
TTE Combo

Universal LAN/GPRS Communication Module

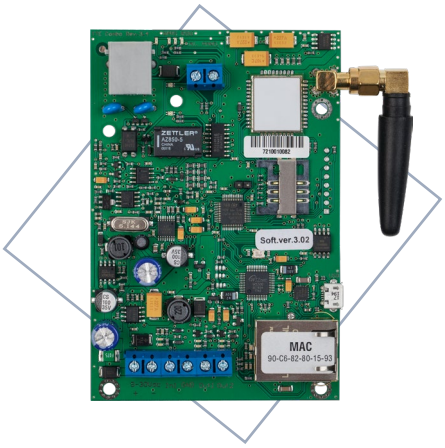

- Compatible with control panels capable to transmit Contact ID (CID);
- Control panel communication supervision;

TTE Combo is an universal module, that can be connected to any panel capable to transmit CID events. TTE Combo transmits those events to Ajax SP Pro server through LAN or GPRS network. TTE Combo is used to send alarm messages to monitoring center or end-user. The module is mounted in small plastic box suitable for wall mounting. It is possible to program and to control the TTE Combo module remotely via AJAX SP Pro software application.

Features

- Compatible with control panels capable to transmit Contact ID (CID);
- Control panel communication supervision;
- 2 Communication channels – LAN and/or GPRS;
- Main and Back-up reporting channels;
- Connecting to AJAX SP PRO through IP or DNS address;
- LAN settings – Manual or Automatic (DHCP);
- Jumper for restoring of the default factory settings;
- Micro USB port for direct programming.

Technical Specifications

Current Consumption:	
-Normal operation mode (standby)	100 mA
-Max. consumption	200 mA
Power supply	9-30V, no tolerance
Outputs	2, 100 mA, OC type
Inputs	1, Tamper/NC to GND
Ethernet port	10/100 MBps
GPRS working frequency	850/900/1800/1900 MHz
Antenna connector (SMA)	50 ohm
Operating temperature	-20°C - +60°C
Dimensions	73x108mm

Last update: 02/2025

info@teletek-electronics.bg
teletek-electronics.com