DH-PFM141

Hi-fidelity Pickup



Features

- Omni-directional condenser microphone, high fidelity;
- 30KV Air contact ESD, built-in Lightning Protection, power supply polarity reversal protection and electrostatic protection; with ALC, DSP digital noise reduction processing and AGC processing;
- Easy to install, match with cameras or storage devices which have audio function!


Specifications

Model	**DH-PFM141**
Properties	
Scope	5-100m^2
Sensitivity	-32dB(-45~-15dB adjustable)
Frequency response	20Hz～20kHz
Directional characteristic	Omni-directional
SNR	80dB(1m 40dB sound source SPL)
Dynamic range	104dB(1KHz at Max dB SPL)
Max. sustainable sound pressure	120dB SPL(1KHz, THD 1%)
Output impedance	600Ω(non-equilibrium)
Output signal amplitude	2.5Vpp/-25dB
Working voltage	DC 12V(9~15V)
Working current	60mA(50~100mA)
Working temperature	-30℃～+70℃
Color	White

DH-PFM141

Outer shell	PC
Dimension	ϕ78mmx26mm
Weight	73g
Carried standard	CE/FCC

Dimensions (mm)

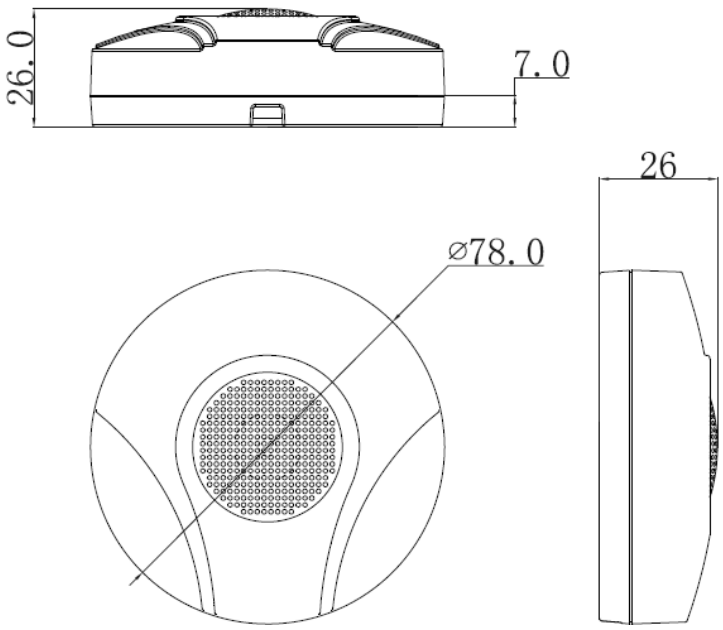

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.