Zone Voice Alarm Remote Microphone
EN-6500RM




Features:


- Digital voice evacuation system remote paging microphone.
- Each microphone of 12 zone capacity.
- System support 32 remote microphones of loop connection.
- System indicators of AC, DC, fault, Mic status and test.
- 12 zone selection buttons and all zone button.
- 12 zone selection buttons can be programmed.
- Two RJ45 ports for connection with EN-6500 and next remote microphone.
- One 3.5mm line input, with output volume control.
- Support PPT and normal paging two modes.
- CAT5 or CAT6 cable communication up to 600 meters.
- DC24V power supply from EVAC-500 controller.
- Support loop connection and paging microphone failure has been supervised.

Specifications:

Model	EN-6500RM
Description	Voice Alarm Remote Microphone
Power Consumption	3W
Zone Capacity	12 Zones
System Capacity	32 Remote microphones
Line Inputs	350mV, 10kΩ
Mic Input	5mV, 600Ω
Frequency Response	80Hz~16kHz
THD	1% at RMS,1KHz
S/N Ratio	>70dB
Operating Temp	-20 to +70
Power Supply	DC24V, ±20%
Humidity	<95% no condensation
Dimension	256(W)×149(H)×52(D) mm
Weight	1.5kg

Rear Panel:

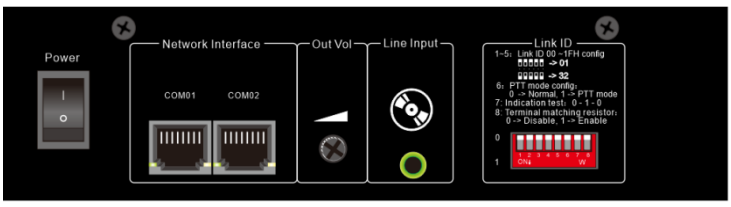

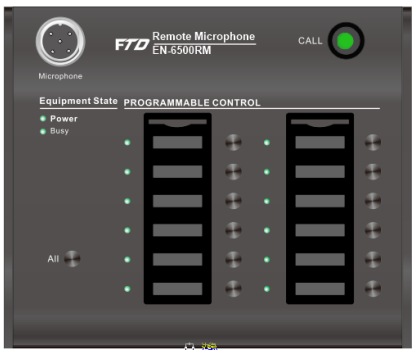

www.ftdaudio.com, info@ftdaudio.com