KIT PRODUCT TECHNICAL DATASHEET
SET R23/373




Composition SET R23/373

CODE	DESCRIPTION	QTY
R23/372	Electromechanical articulated motor 230V AC irreversible ideal for swing gates with leaf up to 3,5 m of length. With mechanical limit switch. With short articulated arms.	2
KIT H70/22	Electronic kit with control unit H70/200AC for 2 motors, with T80/TX2 remote control.	1
	Composition KIT H70/22	
	H70/200AC/BOX Control unit for 2 motors 230V AC with slow down, with plastic box.	1
	H93/RX22A/I Plug-in receiver fixe code 2 channels 433,92 Mhz (500 storable codes) for control unit series H70, B70, EDGE, CTRL and F70.	1
	T80/TX2 Dual code transmitter (modality fixed code or rolling code), 433,92 Mhz. 2 channels, with radio for copy.	2
	R90/F2ES Pair of external photocells synchronized.	1
	FIFTHY/230 LED flashing light series FIFTHY 230V - 115V with integrated antenna.	1
	R99/C/001 Signboard "Automatic Opening".	1

PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	50%
Torque	400 N m
Operating temperature	-20+55° C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,5 Rpm

Opening time	14 s
Motor thermal protection	150° C
Incorporated condenser	10 µF
Limit switch	Microswitch in opening and closing
Encoder	-
Maximum dimension product in mm (L x W x H)	355 x 190 x 160
Product weight packed (Kg)	35,2

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

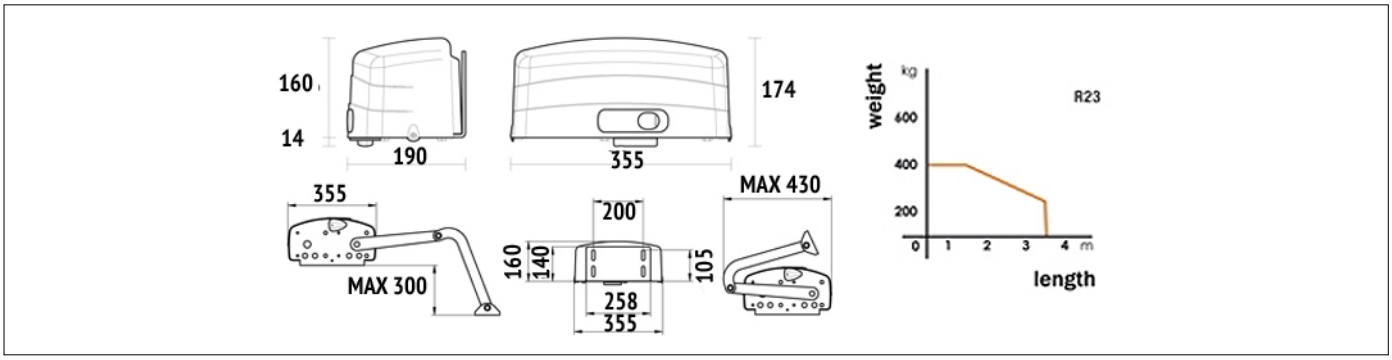


PRODUCT ACCESSORIES



LT302
Arms short for articulated motor.



KT218
Gate pull bracket for series articulated.



KT208
Plate for fixing to post R23 series.