BRAVO MC
Wireless Magnetic Contact

EN 50131
GRADE 2 Class II


Description

BRAVO MC is a wireless magnetic contact designed for operation in BRA VO wireless intruder alarm systems or with ECLIPSE WL wireless expander module in ECLIPSE hybrid systems. The detector is suitable for monitoring of entry -exit or instant type zones and can be located in a distance up to 400m away from the control panel.
The detector has an additional hardware zone for connecting of wired magnetic contacts.
BRAVO MC wireless magnetic contact is certified to EN50131, GRADE 2, Class II.



Technical Specifications

Battery	1x3V/1500mAh, CR123A type
Battery life	3 years
Operation frequency	868MHz
Radio distance (open space)	up to 400m
Operation temperature	-10 °C ÷ +50 °C
Storing temperature	-40 °C ÷ +50 °C
Operation distance	25-30mm
Dimensions	93 x 31 x 27 mm

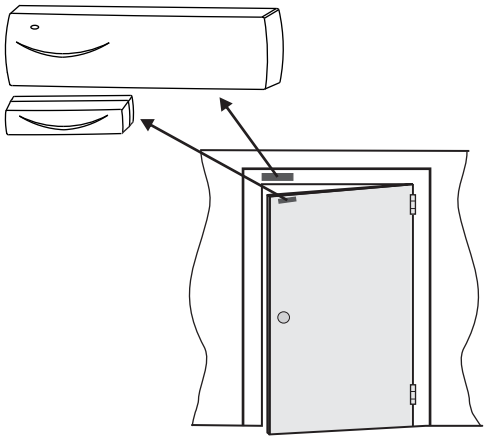

Functional Specifications

- Quick and easy mounting in the protected site
- Suitable for detecting of door or window opening
- Bi-directional tamper switch for self -protection of the box
- Reset button for restoring the factory settings
- Hardware zone
- Plastic pads for the magnet when mounting on metal surfaces

Packing Information

- Single packing bo x - 1 unit BRA VO MC, dimensions 107 x 31 x 76mm
- Master packing bo x - 130 units BRA VO MC, dimensions 500 x 367 x 230mm

Compatible Product Range

- BR AVO EX T - W ireless panel with external power supply
- BR AVO INTR - W ireless panel with built-in power supply
- ECLIPSE WL - W ireless expander module for ECLIPSE control panels

Contact Information

Teletek Electronics JSC
14A Srebarna Str, 1407 Sofia, Bulgaria
Tel.:+359 2 9694 800
Fax: +359 2 9625 213
info@teletek-electronics.bg
www.teletek-electronics.com