Magnetic Encoder

24V DC

KIT PRODUCT TECHNICAL DATASHEET
SET C40/3301




Sstv kmplt SET C40/3301


KD/ŠIFR	PIS	QTY
KIT C40/1000	KIT C40 complete with control unit with integrated radio, motor and accessories for series guides C40. With 2 radio control E80/TX52R/2	1
	Sstv kmplt KIT C40/1000	
	E80/TX52R/2 Prdanik sa fiksnim kodom 433,92 Mhz. 2 kanala, sa radiom za vzu.	2
C40/G3300M	Press-folded carbon steel track with on-board motor attachment, length 3300 mm with belt already installed on board.	1

HNIK SPCIFIKCI PRIZVD	
Line Pover	220V AC ± 10% 50 Hz
	24V DC
Nazivna snaga	200W
Izostajanje	70%
Maks potisak	1000N
Radna temperatura	-20+50°C
Nivo zaštite	IP40
Reductor Type	Nepovratan
Brzina manevrisanja	20 cm/s
Granicnim pr?kidac?m	Otvaranje
Kontrolna jedinica instalirana na brodu	YES
Enkod?rom	Analogue with hall effect
Maksimalni otvor blende	što se tie 2,6m
Dužina vodica	3,3m
Težina proizvoda pakirana (Kg)	12,3


DIMNZI PRIZVD

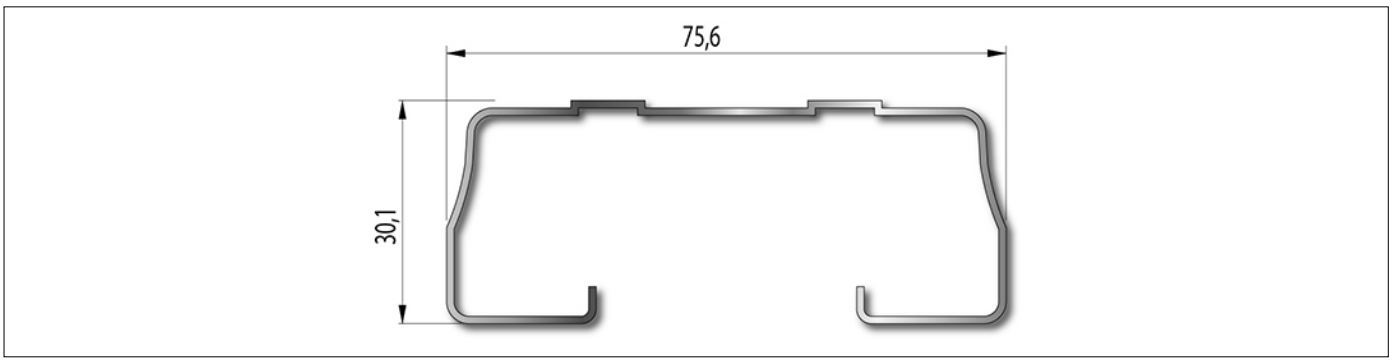


PRIPRM Z INSTLCIU

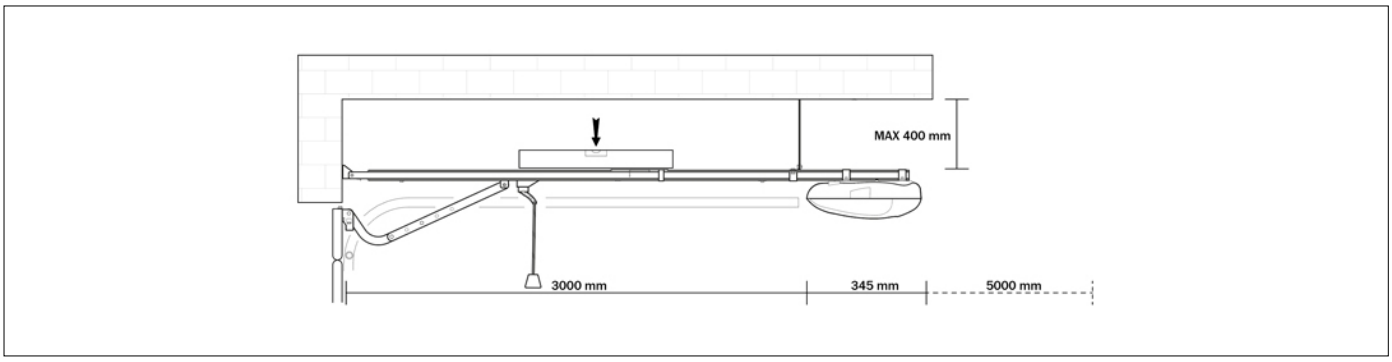


DDTN PRM PRIZVD



RL654
Komplt za oslobaanj sa spoljn stran bz ruic.



RL655
Komplt za oslobaanj sa spoljn stran sa ruicom.



LT314
Par opcionih montažnih nosaa.