
Digital to Analog Audio Converter

Optical / Coaxial to RCA Audio Converter

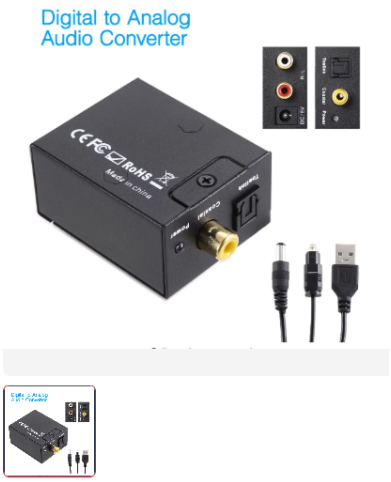

TECHNICAL INFORMATION

Input	1 × Toslink; coaxial or Toslink digital audio
Output	2 × RCA (L/R) analog audio
Sampling Rate	32, 44.1, 48 and 96 kHz; listing also states support up to 192 kHz
Power Supply	5V DC / 1A
Power Consumption	0.5 W
Audio Support	Uncompressed 2-channel LPCM digital audio
Installation	Easy to install and simple to operate