

MP800 3,5” Handsfree video inside unit

Digital video inside unit with 3,5” LCD display, flat front with touch functional icons Attention! A newer generation of the device with new functionalities is now available: MP800 (G2) ACO receivers are solid devices, made of the best quality materials, functional and simple to use Reliability, durability and innoviation are trademarks of ACO brand.


Index	MP800 3,5” (G2)
Description	Video door entry unit for P system, flat front with touch functional icons and colour 3,5” display
Material	Housing made of ABS
Available colours	White
Display	3.5″ color LCD
Mounting	Surface
Dimensions (mm)	198,3×81,5×26,4
Installation type	Digital: twisted pair cable cat. 5e or 6
Power supply	15VDC (min. 13,5V; max. 18V), 280 mA
Stand-by power consumption	~ 0,2W
Inputs	1 x RJ45 socket (bus connection) 4 x ARK screw connectors audio and power line connection 1 x screw connector “RING”: – connection of NO contact e.g. “bell” button – doorbell function (activated after a contact with the system GND) 2 x ARK screw connectors video signal connection
Outputs	– backlit touch icons – handsfree (loud speaker) – door release or control over home automation without established connection – 7 levels of sound adjustment – clear, disturbance free sound – intuitive and comfortable interface – full privacy of conversation – many handsets can be connected in the same apartment – door bell function – optical signalisation of ringing and mute mode – if the address „0” is set, the unit receives every call made in the system – home automation: control over external, devices like gates, lights or blind rollers – compatible with all digital devices from CDN, INSPIRO and FAMILIO range
Attributes	– illuminated touch icons – hands-free

ACO © All rights reserved

– 7-step sound adjustment (rings and calls)
– clear, interference-free sound
– intuitive and comfortable to use
– full privacy of the connection
– possibility to work several receivers at one address
– doorbell function
– the monitor can receive any call address (after setting the address “0”)
– home automation: control of external devices,
e.g. gate, barrier, roller blinds, lighting
– opening or controlling home automation without an active connection
– compatible with all digital devices from CDNP, Inspiro and Familio P/PV groups
– colorful, expressive image
– preview image without active connection
Features available in new generation (G2):
– image preview for 20s
– possibility to attach a permanent preview
– built-in relay outputs activated independently for 1s (potential-free, separated from the system),
– Auto open function (when the ringing is detected, the door will open)


ACO © All rights reserved

Schema

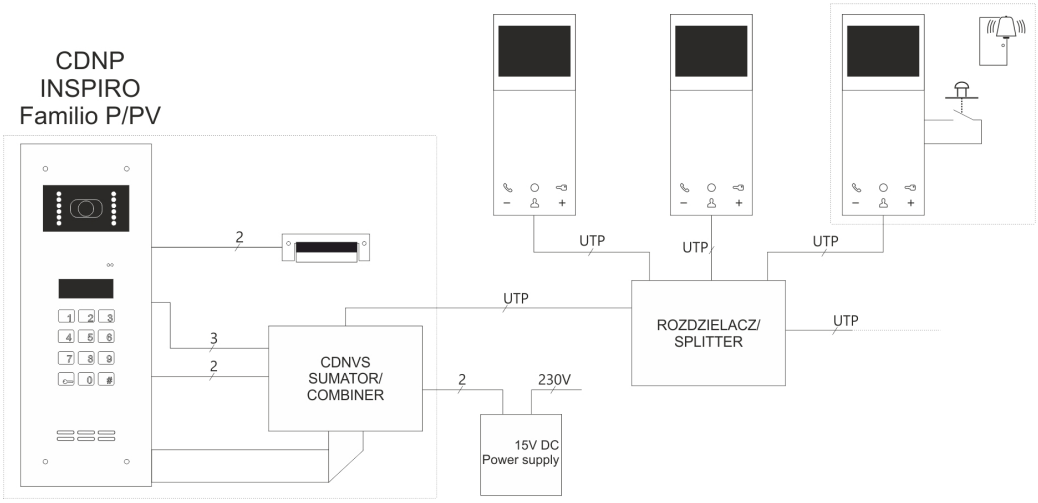

ACO © All rights reserved

Dimensions

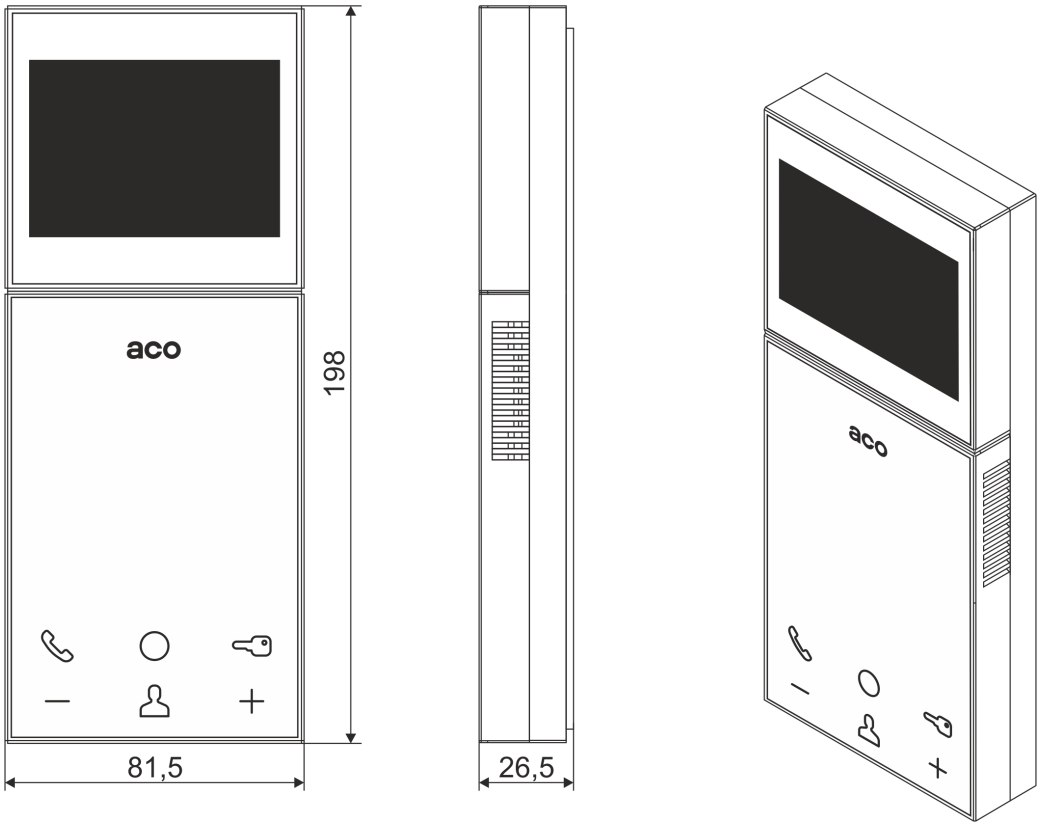

ACO © All rights reserved