

PRODUCT TECHNICAL DATASHEET

MONOS4/220

230V AC 230V AC




CODE	DESCRIPTION	PCS/PALLET
MONOS4/220	Electromechanical actuator 230V AC, irreversible, ideal for swing gates with leaf up to 4 mt lenght.	50

PRODUCT TECHNICAL SPECIFICATIONS


Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	30%
Thrust	2400N
Operating temperature	-20 C° +55 C°
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time at 90°	24 s
Stroke	400 mm
Motor thermal protection	150° C
Limit switch	-
Encoder	-
Maximum dimension product in mm (L x W x H)	1223 x 178 x 111
Product weight packed (Kg)	8,5
Number items per pallet	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

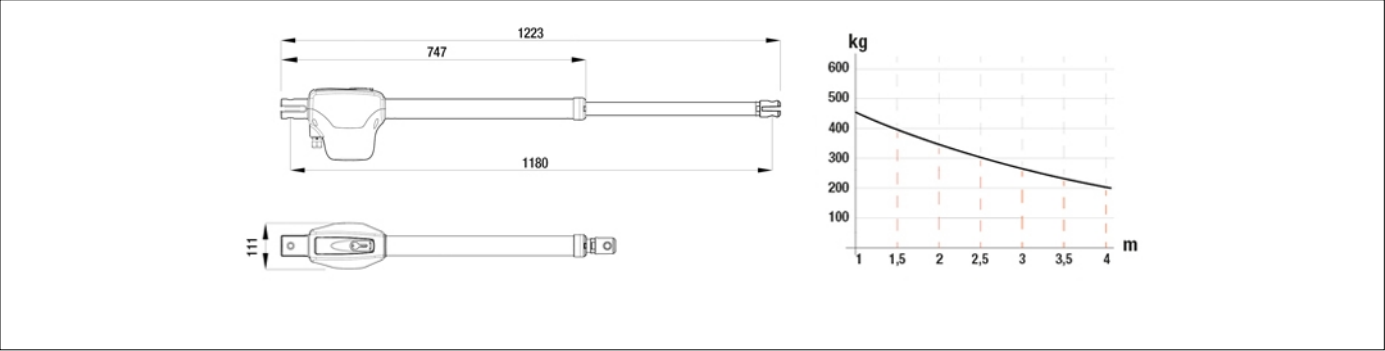

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

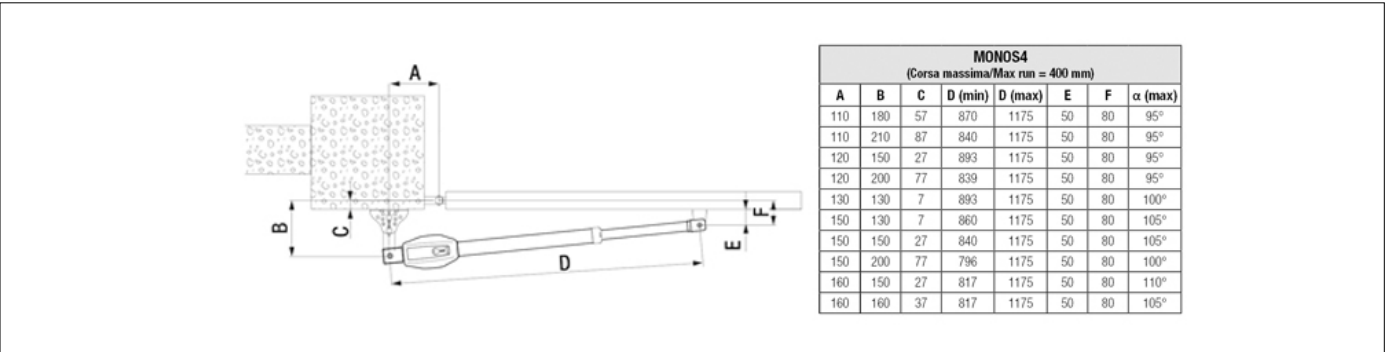

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES

HT420
MONOS4 Series stem cover

KT204
Short rear hinge plate, to weld.

KT246
Kit of screw-adjustable short rear bracket and front bracket to screw (MONOS4).

R99/C/001
Signboard "Automatic Opening".