WIFI Keypad & RFID Access



SK13-WIFI


Main Features


> One relay, 10000 card/ PIN users, 500 APP users
> Card Type: 125KHz EM Card
> Add / Delete users by APP
> Can set Time Restriction for users
> Temporary Password (One-time Or Period Code)
> Door Keep Open Mode
> Support checking Opening Record
> Remotely Access (Support 3G/4G/5G)
> Multiple Access Modes: Smartphone, Card, PIN
> Doorbell Call Notice
> Metal case, anti-vandal
> Waterproof, conforms to IP66

Data Sheet

User Capacity Common User Visitor User Panic User	**10000** 9988 10 2
PIN Length	**4~6 digits**
Operating Voltage Idle Current Active Current	**12V DC** ≤ 60mA≤ 150mA
Proximity Card Reader Radio Technlogy Read Range	**EM** 125KHz 2~6cm
Wiring Connections	**Relay output, exit button, alarm, door contact, Wiegand input/output**
Relay Adjustable Relay Output Time Lock Output Load	**One (NO, NC, Common)** 0~99 Seconds (5 seconds default) 2 Amp Maximum
PIN Length	**4~6 digits**
Operating Voltage Idle Current Active Current	**12V DC** ≤ 60mA≤ 150mA
Wiegand Interface PIN Output	**EM card: Wiegand 26~44 bits input & output** (Factory default: Wiegand 26bits) 4 bits,8bits (ASCII),10 digits Virtual Number(Factory default:4bits)
Environment Operating Temperature Operating Humidity	**Meets IP66** -40° C ~ 60° C (-40° F ~ 140° F) 0%RH ~ 98%RH

* Support unlock remotely through the APP
* Add/ delete users through the APP
* Query open door record

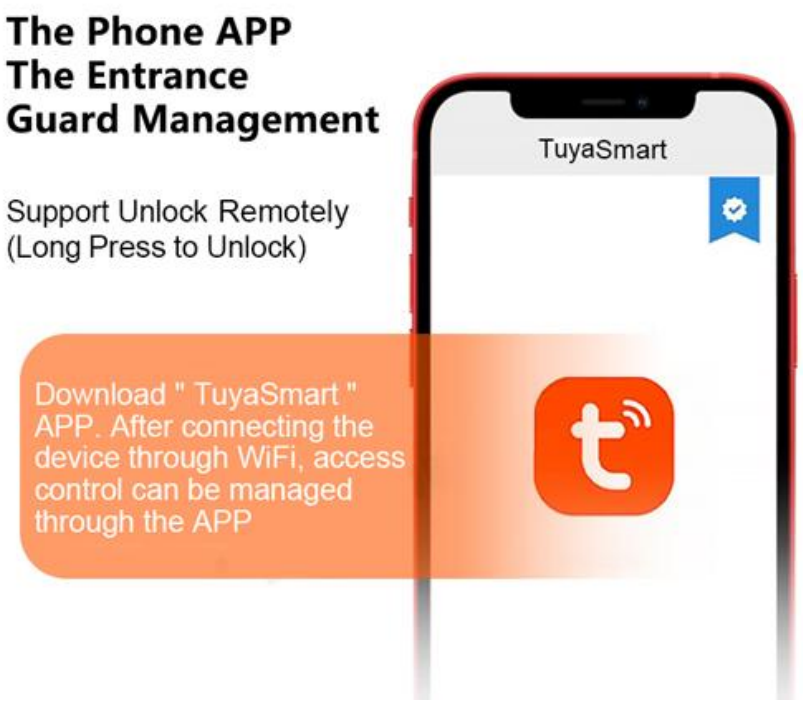

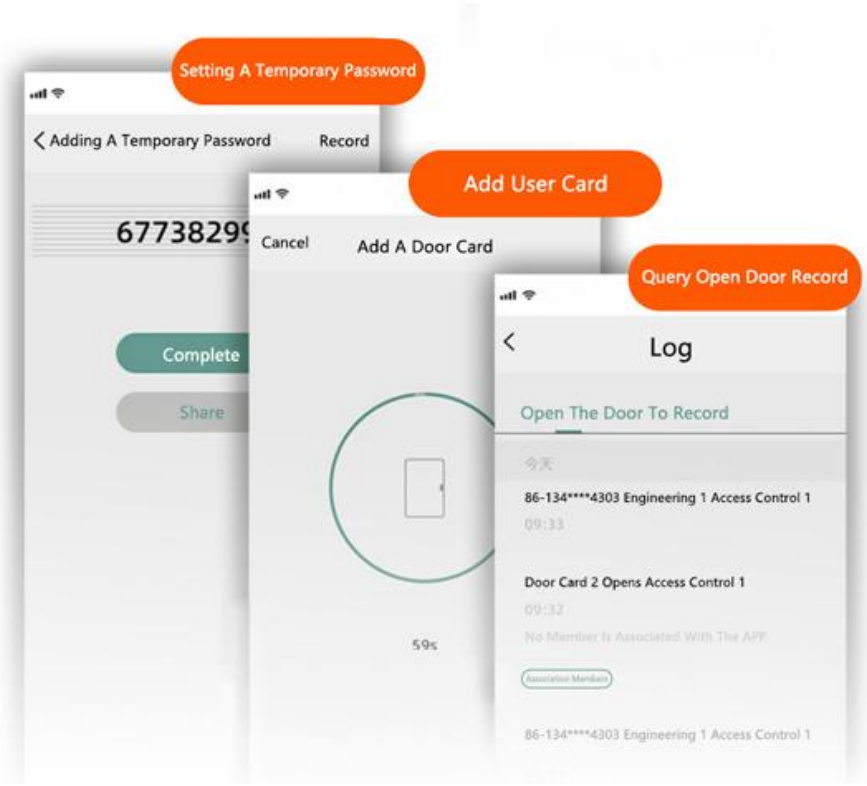

Temporary Code-Can set time restriction



APP

Send password

Set time

Visitor



Door Keep Open Mode

Door bell call
notification in APP



10,000 CARDS/PIN USERS

Big User Capacity

