EN54 FireProtect Jeweller sounders and VADs

Wireless addressable fire alarm sounders and visual alarm devices (VADs)



Product versions

EN54 FireProtect (Sounder) Jeweller

Wireless addressable fire alarm sounder

EN 54-3 · EN 54-25

Colors:



EN54 FireProtect (VAD) Jeweller

Wireless addressable visual fire alarm device (VAD)

EN 54-23 · EN 54-25

Colors:



EN54 FireProtect (Sounder/VAD) Jeweller

Wireless addressable fire alarm sounder combined with a visual alarm device (VAD)

EN 54-3 · EN 54-23 · EN 54-25

Colors:



Rules met. Conventions shattered.


EN54 FireProtect Jeweller sounders and VADs deliver instant audible, visual, or combined fire alarm alerts in full compliance with EN 54 standards. The devices support both wall and ceiling mounting. Engineered for installation efficiency, they feature built-in wireless communicators and can be mounted in minutes without enclosure disassembly. Setup, configuration, and testing are handled in intuitive Ajax apps. Maintenance is just as simple, with real-time device monitoring and early low-battery notifications.


EN 54-3 Sound indication

100 dB sounder with an adjustable volume[1]

32 selectable tones

EN 54-23 Visual indication with an LED frame

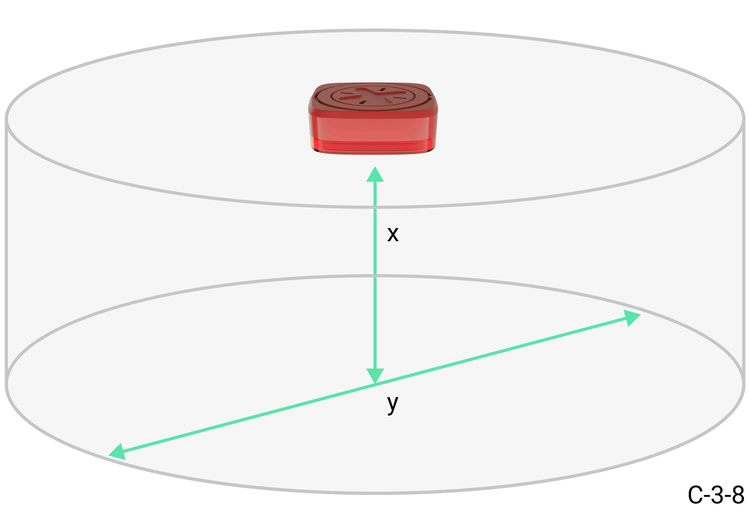

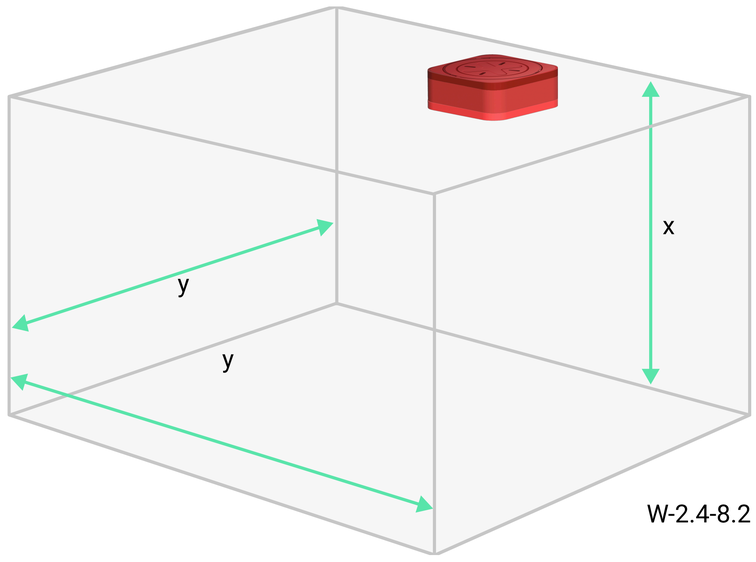

When mounted on a ceiling

Coverage diameter	Installation height
8 m	3 m

When mounted on a wall

Coverage volume	Installation height
2.4 m × 8.2 m × 8.2 m	2.4 m