
# 1. Standing cabinet

**Standard specification**
ANSI/EIA RS-310-D
IEC60297-2
DIN41497 PART 1
DIN41494 PART7
GBIT3047.2-92; ETSI







Front door



Rear door

| | |
|---|---|
| Type | Glass front door; Plate steel rear door(with handle lock) |
| **Size** | **600X600X1610MM/32U** |
| Quality | Loading capacity: 1000 kgs |
| Thickness | Mounting profile:2.0mm; monting angle: 1.5mm; others: 1.2mm |
| Color | RAL9004 |
| Certification | CE |
| Material | Toughened glass(front door); SPCC cold rolled steel |
| Finishing | Degreasing silanization, electrostatic spray |





Loading capacity

**Standard Configuration**

| S/N | Name | Qty | Unit | Material | Finishing | Remark |
|---|---|---|---|---|---|---|
| 1 | Glass front door | 1 | PC | 5mm toughened glass | ---- | |
| 2 | Plate steel rear door | 1 | PC | 1.2mm SPCC cold rolled steel | Electrostatic spray | |
| 3 | Top cover | 1 | PC | 1.2mm SPCC cold rolled steel | Electrostatic spray | |
| 4 | Bottom Panel | 1 | PC | 1.2mm SPCC cold rolled steel | Electrostatic spray | |
| 5 | Frame | 2 | PC | 1.2mm SPCC cold rolled steel | Electrostatic spray | |
| 6 | Side panel | 2 | PC | 1.2mm SPCC cold rolled steel | Electrostatic spray | |
| 7 | Mounting profile | 4 | PC | 2.0mm SPCC cold rolled steel | SGLC | |
| 8 | Mounting rail | 4 | PC | 1.5mm SPCC cold rolled steel | SGLC | |
| 9 | 2'' Heavy duty casters | 4 | PC | ----- | ----- | |
| 10 | M12 adjustable feet | 4 | PC | ----- | ----- | |
| 11 | T-type Allen wrench | 1 | PC | ----- | ----- | |
| 12 | M6 screw & nut | 20 | Sets | ----- | ----- | 20 sets for lower 32U |

# Standing network cabinet

2. Drawing

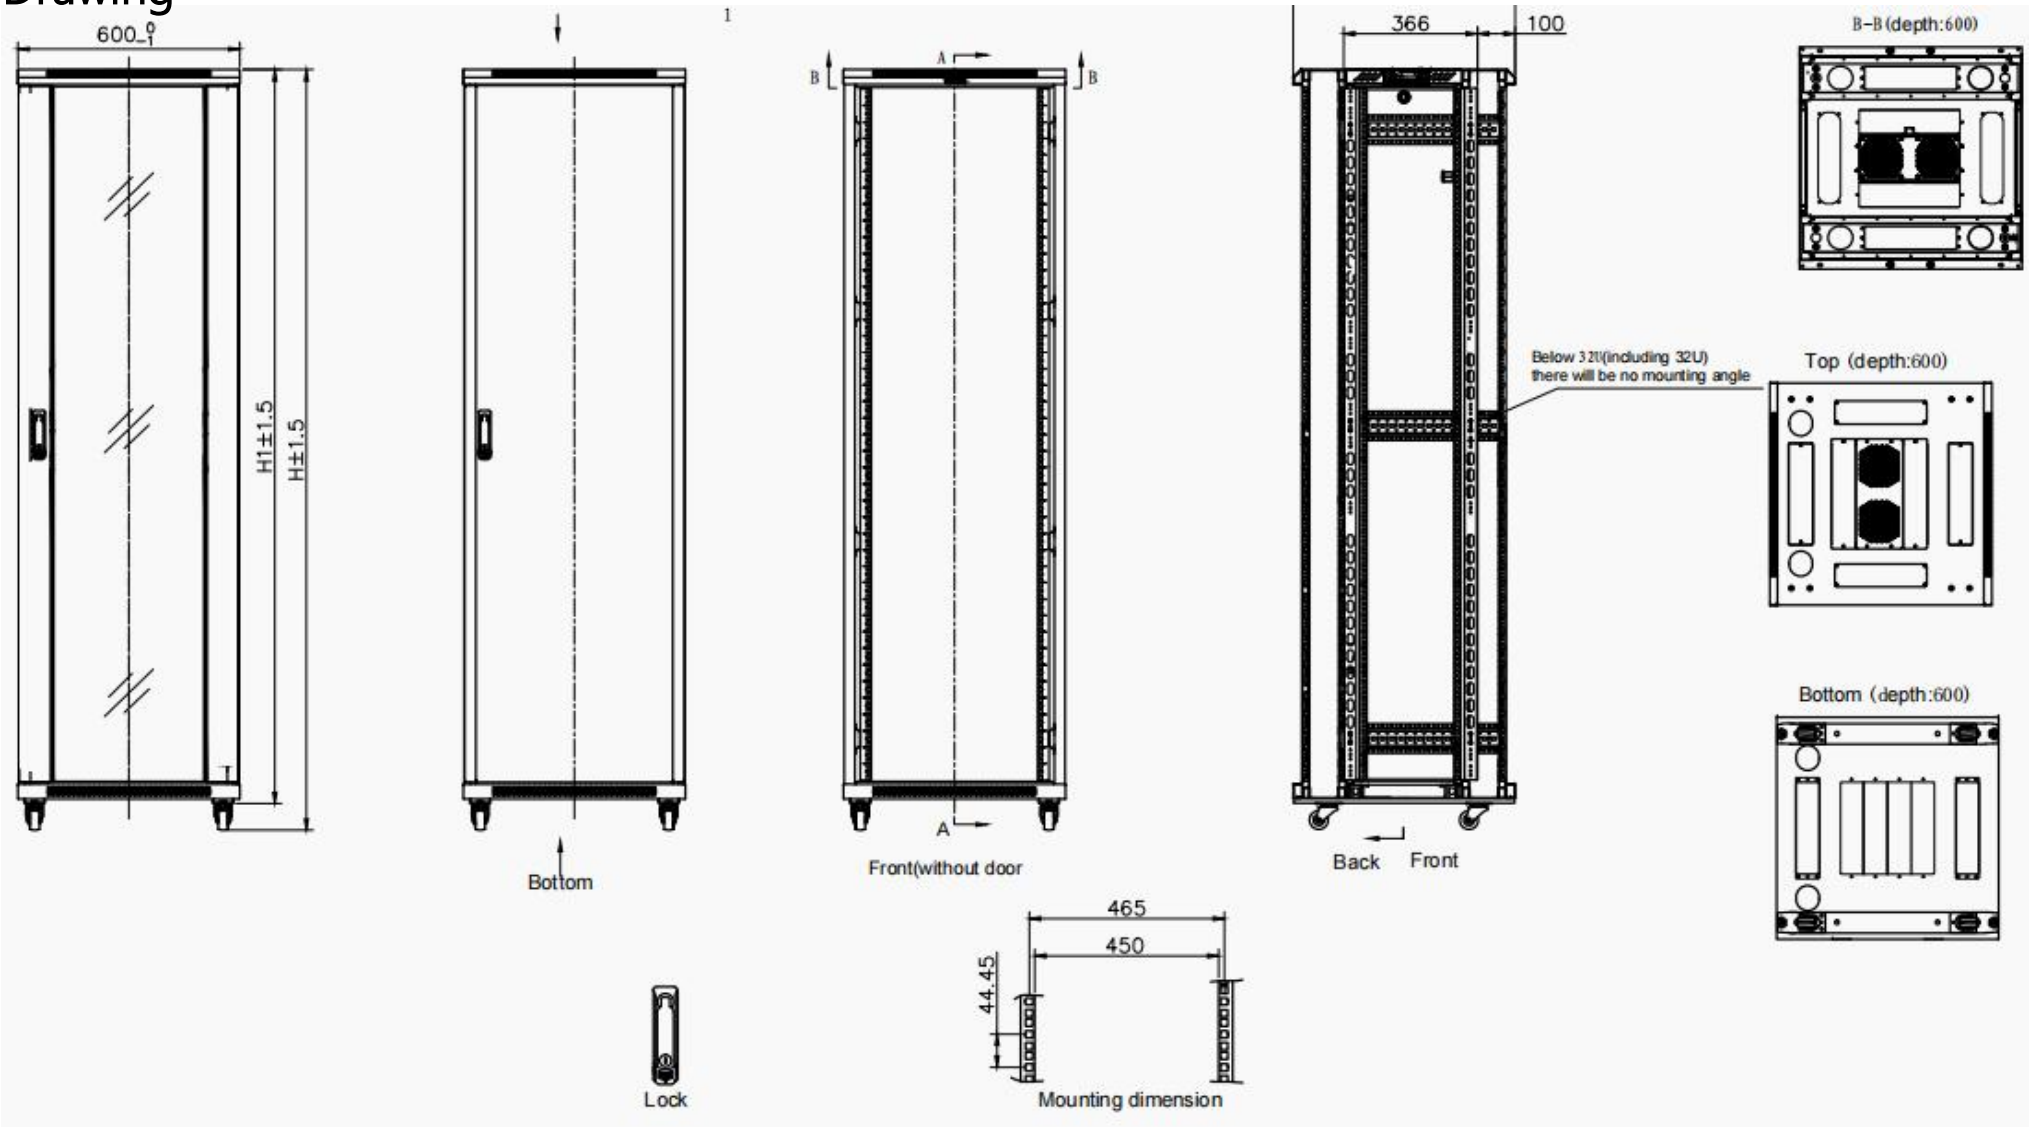


# Drawing of standing network cabinet

## 3. Pictures

Comply with
ANSI/EIA RE-310-D
IEC60297-2
DIN41494: Part1
DIN41494: part7
Rohs and CE









