
VTOB111

Flush Mounted Box for 2 Modules




Features

- Material:SPCC
- Size:255.4mm*143.4mm*50.8mm
- Weight:0.7kg
- Flush Mounted Box

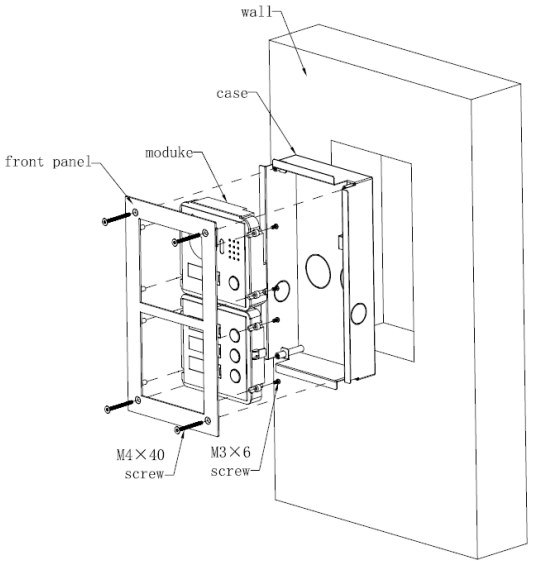

Installation

a) Dig a hole on wall. Module VTO has speicifications of single module, 2 modules and 3 modules. A single module dimensions are 115*115*57(mm); 2 module dimensions are 237*125*50(mm), 3 module dimensions are 349*125*50(mm).
b) Embed case into wall until border of the case lean against the wall.
c) Align the device on front panel with hole position. Fix with screw (M3×6 cross recessed countersunk flat tail machine screw), and the module is fastened on front panel.
d) Fix front panel on case according to hole position, fix with (M4×40 inner hex flower sunk head flat tail machine screw), and front panel is fastened on the case.
e) Write room no. on provided name card or name of resident. Insert name card cover.
Note:
a) Name card and name card cover are included in accessories by default.
b) Module VTO has two packages of 2 modules and 3 modules. The figure takes 3 modules as an example.
c) You may power up device only after all modules are well connected, otherwise module connected after power up will not operate.

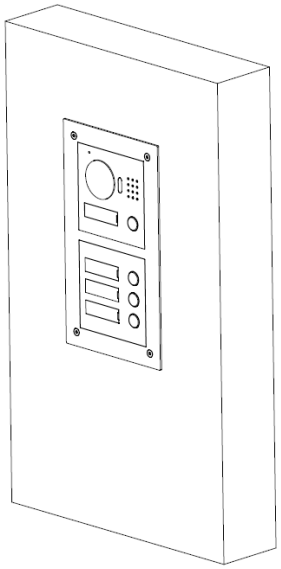

Rev 001.001 © 2016 Dahua. All rights reserved. Design and specifications are subject to change without notice.