DHI-ARC2008/2016C-G

Network Alarm Controller



Features

- 8/16 on-board zones
- 4 alarm out, expansion to 20 (ARM708,ARM716)
- 8 alarm keypad (ARK10C)
- Wireless remote control to arm/disarm
- Reliable power switch, compatible with storage battery
- Support PSTN, IP to upload alarm signal
- 2G network alarm function (-G model)



Technical Specification	
Wired Zones	8/16 on-board zones
Alarm Output	4-ch relay output (30VDC 1A), extend to 20-ch
Network	1-ch 10M/100M Ethernet port, RJ45 port -G (GPRS 2G network)
Protocol	TCP/IP
Log	5000
Independent Security service center	2 groups phone call security center 1 group active registration center 2 groups network security center
Siren	Support
PSTN Detect	Support
Anti-cut, Anti-circuit	Support
SMS	-C Support
Remote Upgrade	Support
Tamper Alarm	Vandal proof
Alternate Power	Internal: +12V 7AH Lead-acid battery
Power	DC14.5V, Max 35W
Working Environment	-10°C-+55°C
Overall dimensions\weight	275L*275W*77H mm/<3kg
Installation	Wall mounting

Ordering Information

Type	Part Number	Description
Controller	DHI-ARC2008C	8 zones Network Alarm Controller
Controller	DHI-ARC2008C-G	8 zones Network Alarm Controller with 2G sim card slot
Controller	DHI-ARC2016C	16 zones Network Alarm Controller
Controller	DHI-ARC2016C-G	16 zones Network Alarm Controller with 2G sim card slot
Remote Control	ARA21W	Remote Control, Max. 8pcs
Keypad	DHI-ARK10C	Alarm keypad, Max. 8pcs


Application

House, Store, Office room

Network alarm controller



Dimensions

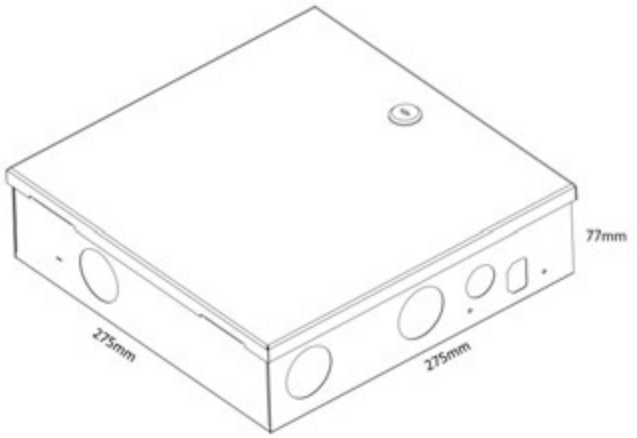

Rev 001.001 © 2016 Dahua . All rights reserved. Design and specifications are subject to change without notice