
ASSIST-IP1200L

NETO: 0,00

LáMPARA DE PASILLO

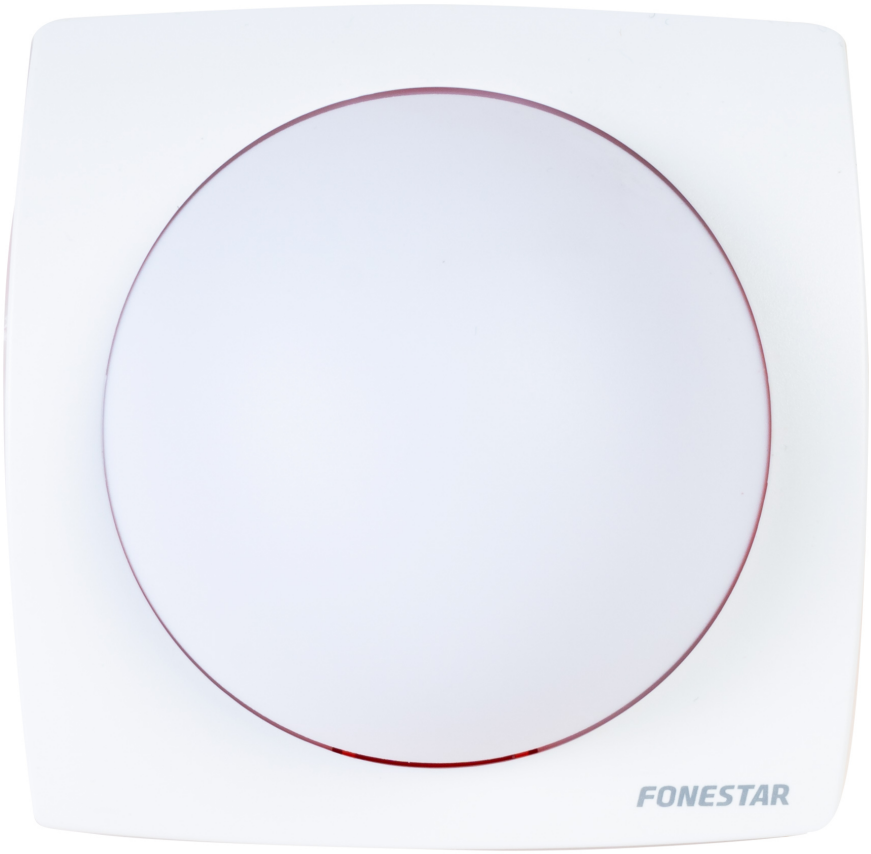

DESCRIPTION

Corridor light. Installation in the upper external part of the door of each room. Allows for a quick look at the room in which a call to the healthcare personnel was placed.

TECHNICAL CHARACTERISTICS

FEATURES	Corridor light. Semispherical, discreet and modern design. Low consumption and high efficiency RGB LED. PoE power supply. Surface or recessed installation. For standard universal square box. Distance between screws: 60 mm.

Expand product information on:
https://fonestar.com/es/ASSIST-IP1200L

INPUT	RJ-45 for direct connection to the VoIP ASSIST-VOIP1200P5 or ASSIST-VOIP1200P10 room control unit
MATERIAL	Fireproof and flame retardant ABS
OPERATING TEMPERATURE RANGE	-10° C to + 60° C Recommended humidity 30%-80%
LED COLOURS	Red, green and blue Multiple colors configurable by software
COLOUR	White (RAL 9010)
POWER	PoE
DIMENSIONS	84 x 84 x 61 mm depth.
WEIGHT	0.1 kg
ACCESSORIES	ABS surface installation box

Expand product information on:
https://fonestar.com/es/ASSIST-IP1200L