MAG8P
Conventional Fire Alarm Panel

EN54-2/4

Description

MAG8 is a conventional fire alarm panel certificated by EN54-2/4, providing 8 fixed zones. Up to 20 (32 SensoMAG Series) fire detectors can be connected to every fire zone. Unlimited number of call points can be connected to every of the fire zones.
MAG8 is situated in a plastic box. The panel is easy for installation and maintenance and provides user -frendly daily operation.
The panel is suitable for residential, small and middle office applications with protected area up to 3000m ^{2}.
The panel is available in different language versions for the front panel.




CE 17
1293
DoP No: 074

1293-CPR-0542

Technical and Environmental Specifications

Main P ower Supply	~230V AC ± 10%
Frequency	50/ 60Hz
Back-up P ower Supply	1 battery, 12V/ 7Ah
Power availability	0.7A
Main power supply fail consumption	125mA
Outputs (sounder circuits on the control PCB module)	2; 24V/ 0.5A fuse
Output, FAULT Relay	1; 3A@24VDC
Output, FIRE Relay	1; 3A@24VDC
Auxiliary output	24VDC/ 0.3A fuse
Fixed zones	8
Detectors per zone / max. number of detectors	32/ 256
Multi language front panels	YES
Operating temperature	0°C to +40°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Weight (without battery)	~2.4kg
Dimensions of plastic box	340x290x100mm

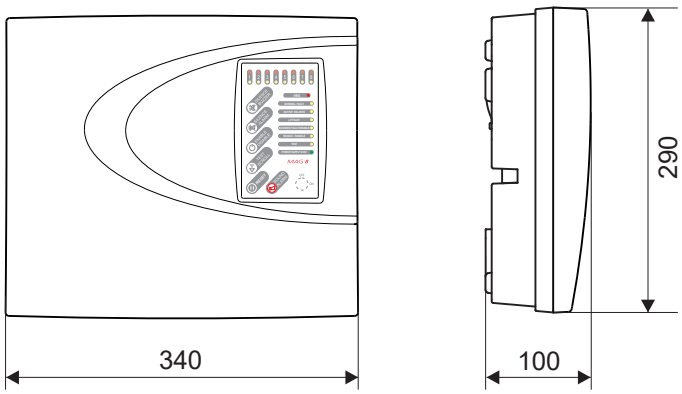

Contact Information:

Teletek Electronics JSC
14A Srebarna Str, 1407 Sofia, Bulgaria
Tel.:+359 2 9694 800
Fax: +359 2 9625 213
info@teletek-electronics.bg
www.teletek-electronics.com

MAG8P

Conventional Fire Alarm Panel

EN54-2/4

Compatible Product Range

- **SensoMAG Series** - Conventional detectors
- **SF Series** - Conventional sounders
- **SF100 Series** - Conventional sounders
- **ML** - LOG module for recording and viewing event
- **MR8** - 8 relay expander module

Packing Information

- **Single packing box** - 1 unit MAG8 Fire Alarm Panel, dimensions 342x295x103mm
- **Carton packing box** - 5 units MAG8 Fire Alarm Panel, dimensions 560x362x320mm

Available Languages

- **English**
- **German**
- **Portugal**
- **Estonian**
- **Lithuanian**
- **Italian**
- **Dutch**
- **French**
- **Romanian**
- **Bulgarian**
- **Turkish**
- **Spanish**
- **Latvian**

Contact Information:

Teletek Electronics JSC
14A Srebarna Str, 1407 Sofia, Bulgaria
Tel.:+359 2 9694 800
Fax: +359 2 9625 213
info@teletek-electronics.bg
www.teletek-electronics.com