
GlandBox

Wiring accessory for control and indicating equipment (CIE)

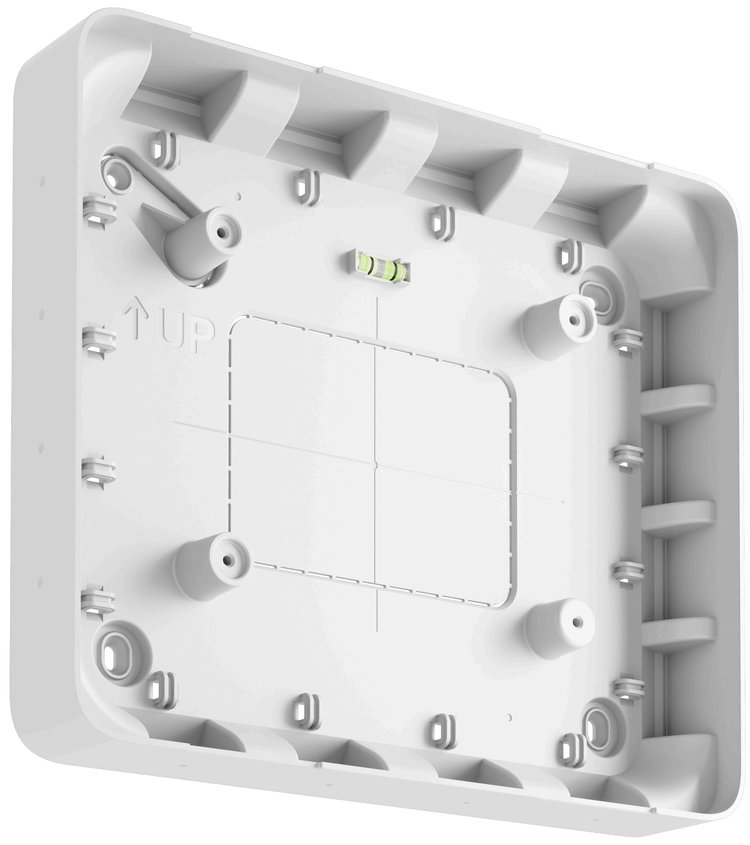

The cleanest way to connect cables

GlandBox is a wiring accessory for neat lateral cable entry into the EN54 Fire Hub Jeweller enclosure. It ensures clean and professional installation when in-wall cable routing isn’t possible — for example, in historical buildings or temporary commercial setups. GlandBox provides secure cable fixation using red glands[1] and integrates seamlessly with the CIE design, maintaining the sleek and tidy look.

- Minimalistic design in a compact size for a neat-looking setup
- 16 places to install cable glands: four on each side of the accessory
- Support for cable gland diameters of up to 20 mm
- Recesses for precise drilling with a hole saw[2]
- Effortless cable routing to the CIE with glands and fasteners to secure cables together
- Easy installation thanks to the built-in bubble level, UP key, and CIE center marking
- Latches to attach the CIE's mounting panel for convenient fixing with screws afterward
- Perforated part for CIE's tamper button to detect device removal from the surface
- The installation kit includes all necessary fasteners

Compatibility with devices

For detailed information, scan the QR code or follow the link:

ajax.systems/tools/devices-compatibility/?models=GB.Y.Y

Installation

Operating temperature range
from –10 °C to +40 °C
from 14 °F to 104 °F

Operating humidity
up to 75%
non-condensing

Protection class
IP20

Flammability rating
UL 94 V-0

Enclosure

Dimensions
263 × 223 × 40 mm
10.35" × 8.78" × 1.58"

Weight
335 g
11.82 oz

Color
black, white

Complete set

GlandBox
Installation kit
Quick start guide

[1] Red cable glands are not included in the complete set.
[2] We recommend using a hole saw for plastic with a diameter of up to 20 mm.

For detailed information, scan the QR code or follow the link:

ajax.systems/ua/support/devices/glandbox

support@ajax.systems
@AjaxSystemsSupport_Bot
ajax.systems