reolink

EN

Trackmix Series P760

Smart 4K Dual-Lens PTZ Camera with Auto-Zoom Tracking



Auto-Zoom Tracking

Pan/tilt to track and zoom in on a moving target automatically.

4K UHD

Delivers sharper images and videos with the finest details.

Dual-Lens

Wide-angle & telephoto lenses for full-view and close-up images.

Dual View Display

See both a full view and a clear closeup on one screen.

Smart Detection

Distinguish people, vehicles, and animals from other objects.

Color Night Vision

Provides full-color nighttime recordings with its spotlights on.

Power over Ethernet


Transmit data and power with only one Ethernet cable.

Two-Way Audio

Talk to anyone in front of the camera in real time.

Weatherproof

Performs well even in harsh weather conditions.

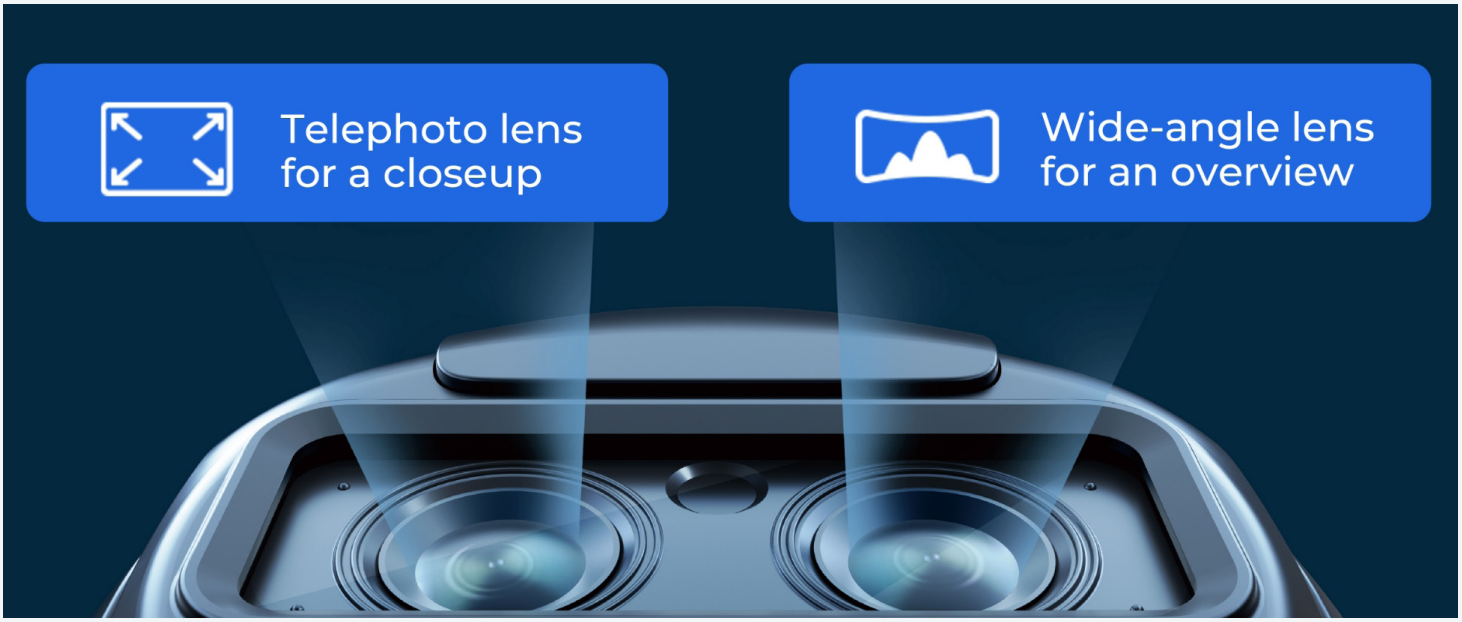


Dual View on One Screen

The dual-lens camera brings you a broad overview and a clear closeup simultaneously and shows them on one screen.



Auto-Track & Auto-Focus

Pans 355° and tilts 90° to automatically follow and zoom in on the moving object, clearly showing you how the event unfolds.

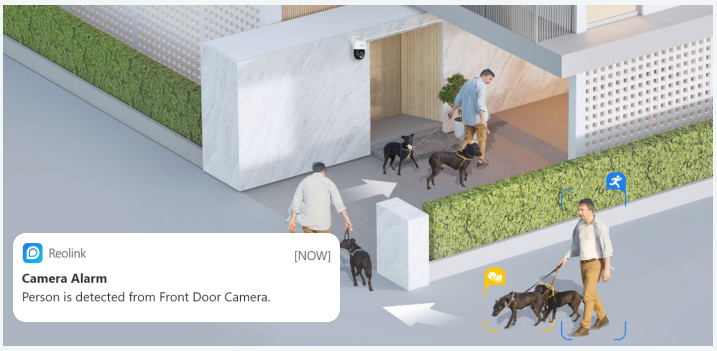

Only the Alerts You Want

Get alerts just for things you care about, like people, vehicles, and animals. No more useless notifications.



Impressive Clarity in 4K 8MP

Get razor-sharp recordings in 4K clarity. Stay better informed with the hard-to-see details captured by the camera.



Flexible Storage Options

Save your recordings to a microSD card of up to 256 GB, Reolink NVR, or FTP server. Choose a way you like and enjoy customized security.

Gallery









One App/Client for All Control

Stay connected to your home or business anytime, anywhere.



Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



Model	Trackmix Series P760	
Video & Audio	Image Sensor	1/3"+1/2.8"CMOS Sensor
	Video Resolution	Up to: 3840 x 2160 (8.0 megapixels) at 25 frames/sec
	Lens	f=2.8mm@F=1.6,f=8mm@F=1.6
	Video Format	H.264, H.265
	Field of View	Horizontal: 104°-38°
		Vertical: 60°-21°
	Zoom Mode	6X hybrid zoom
	Day & Night	IR-cut filter with auto-switching
	Infrared Night Vision	Up to 30 meters (100ft) (LED: 2pcs/850nm)
	Color Night Vision	Spotlights: 2pcs/6500K/450 lumens
	Audio	Two-way audio
Power	PoE	IEEE 802.3af, 48V active
	DC Power	DC 12.0V⎓2A, <12W
Interface	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps RJ45
	Storage	microSD card slot (Max. 256GB)
	Audio	Built-in microphone and speaker
Pan&Tilt	Pan &Tilt Range	Pan: 355°, Tilt: 0°~90°
	Pan Speed	2.5°-90°/s (Speed can be set)
	Tilt Speed	1.5°-60°/s (Speed can be set)
	Preset	32
	Auto Tracking	Support
Software Features	Frame Rate	Mainstream: 2fps - 25fps
		Substream: 4fps - 20fps
	Code Rate	Mainstream: 4096Kbps -8192Kbps
		Substream: 128Kbps -1228Kbps
	Browsers Supported	Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
	Recording Modes	Motion/scheduled recording (default: motion recording)
	Tracking Method	Digital Tracking; Pan/Tilt Tracking First; Digital Tracking First
	Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS,DDNS, FTP, P2P
	Maximal User Access	Supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams) 20 users (1 admin account & 19 user accounts);
	Work with	Google Assistant
Working Environment	Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	Support
Size & Weight	Dimension	228*147*110mm
	Weight	1.21KG
WarrantyWarranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/.



1	Infrared LED	2	Lens	3	Mic
4	Daylight Sensor	5	Spotlight		



1	microSD Card Slot	2	Reset Button

Best Companion



microSD Card



RLA-PS1
(PoE Switch)



Reolink NVR



PoE Injector



Ethernet Cable



Waterproof Lid



Power Extension Cable



Power Adapter

Download Free Reolink App & Client

Learn more: https://reolink.com/software-and-manual/

Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: https://reolink.com/warranty-and-return/