
HIGH POWER / SPEAKERS / PASSIVE

FPRO-25015

PASSIVE HIGH-POWER LOUDSPEAKER.



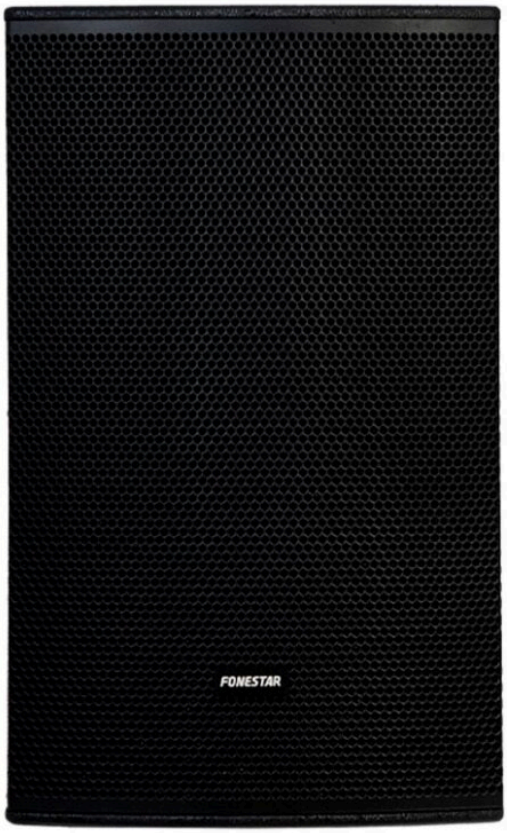

- Great power and sound quality.
- Robust structure and high quality components
- Carrying handles, suspension points and hole in base for 35 mm tube

+ Info:
https://fonestar.com/FPRO-25015

ESPECIALLY RECOMMENDED IN:


Sports facilities


Hospitality


Hotels


All sectors


DESCRIPTION


15" Passive high-power loudspeaker. 250 W RMS@8Ohm. 35 mm tube hole. 14 M8 points


TECHNICAL CHARACTERISTICS


FEATURES	Loudspeaker in reinforced wood. Textured paint finish. Protective front metal grille. Carrying handles. Suspension points. Hole in the base for 35 mm tube.
POWER	500 W maximum, 250 W RMS
LOUDSPEAKERS	1 x 15" woofer: 65 mm coil and 140 mm ferrite magnet 1 compression driver: 1" diaphragm, 1" mouth and 25.4 mm coil
RESPONSE	55-20,000 Hz (± 3 dB)
IMPEDANCE	8 Ohm
SENSITIVITY	100 dB at 1 W/1 m
SOUND PRESSURE	129 dB at maximum power at 1 m
DISPERSION	90° H x 60° V (-6 dB)
CONNECTORS	2 x 4-contact loudspeaker connectors (±1: full range, ±2: full range (parallel))
CROSSOVER	Passive, 2 way, cut-off frequency 1,700 Hz, -6 dB/octave
SUSPENSION POINTS	14 M8 points
COLOUR	Black
DIMENSIONS	430 x 690 x 470 mm depth
WEIGHT	22 kg


+ Info:
https://fonestar.com/FPRO-25015

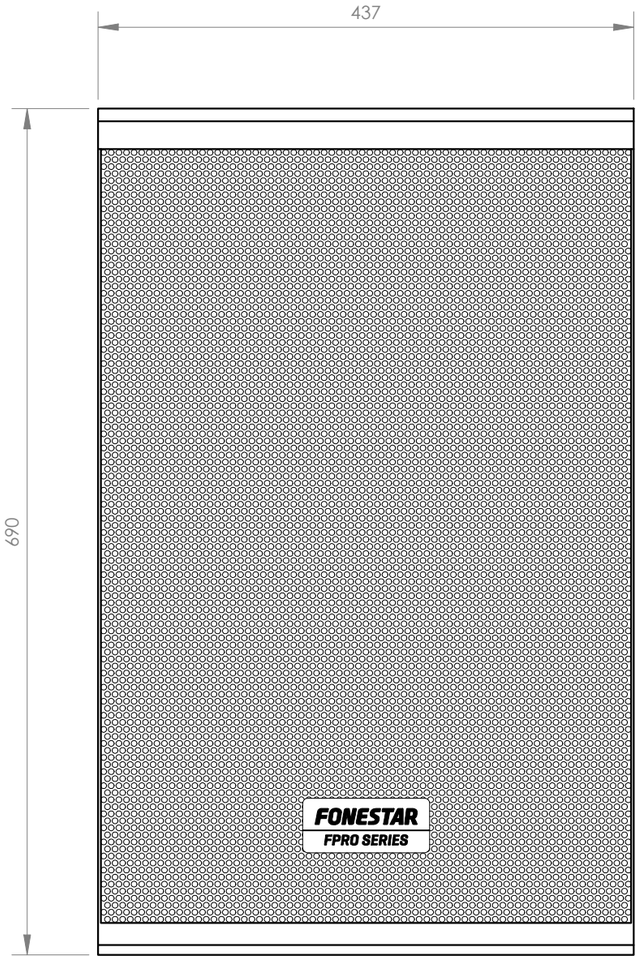

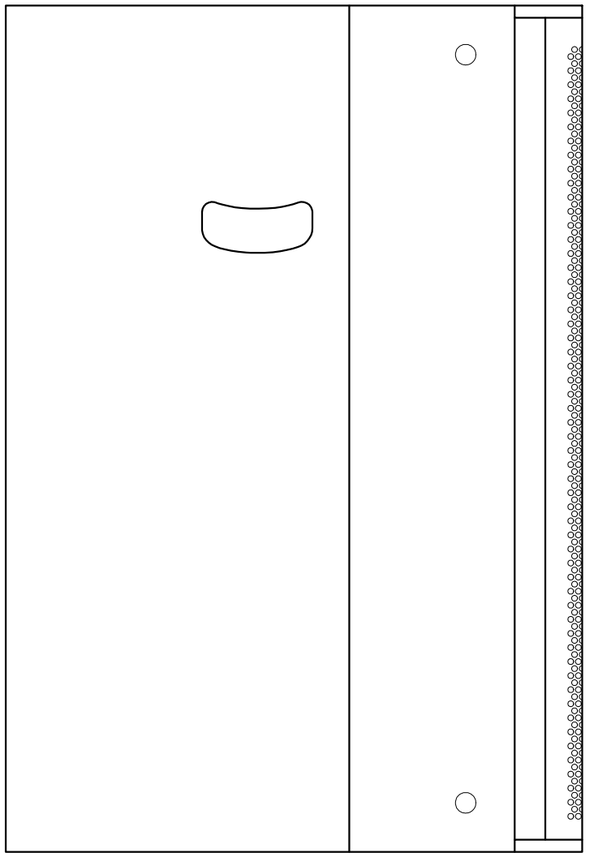

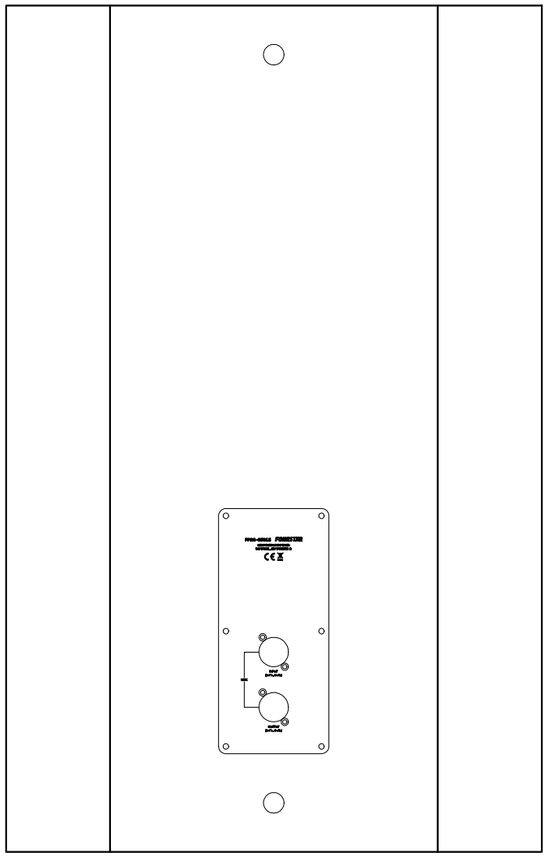

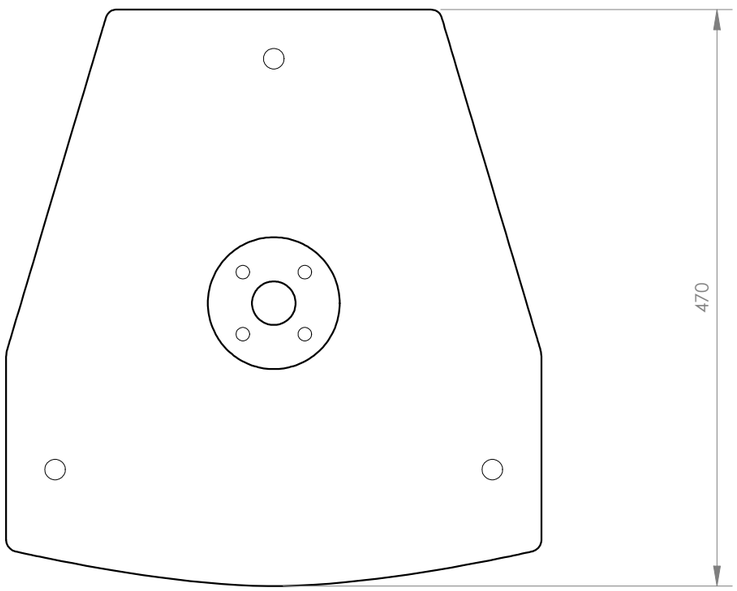

FONESTAR	Model	Description	Units	Scale
	FPRO-25015	PASSIVE HIGH-POWER LOUDSPEAKER	mm	1:5